

CHAT NOW!



LINE @thaikk



CATALOG 2022 EDITION

ADHESIVE TAPE

FOR WIDE VARIETY OF APPLICATIONS



THAIKK
GROUP

Thai KK Industry Company Limited - with 40 years of experience in manufacturing high-quality adhesive tapes, we are able to innovate new products that fits all types of applications.

CONTENTS

Company Profile	3
Technology Overview	4
Quality Overview & Systems	5
New Products	6
Best Sell & Hot Sell	7

INDUSTRIAL PACKAGING & PRINTING

OPP Tape (OPT)	8
OPP-BR Tape (OPT-BR)	9
OPP-Color Tape (OPT-C)	10
OPP-Custom Printed Tape (OPT-P)	11
OPP-Hotmelt Tape (OPTHM)	12
OPP-Hotmelt Printed Tape (OPTHM-P)	13
OPP-Hybrid Tape (OPT-HB)	14
Bag Sealing Tape (OST-C)	15
Kraft Tape (KTE)	16

ELECTRICAL INSULATION

PVC Electrical Tape (VTB)	17
PVC Electrical Color Tape (VTB-C)	18
PVC Electrical TIS Tape (VTB -TIS)	19

CONSTRUCTION REPAIRING

Masking Tape - Stationery (MCT)	20
Masking Tape - Packaging (MCT)	21
Masking Tape - Painting (MCT)	22
Masking Tape - Car Spray (MCT)	23
Masking Tape - High-Temp (MCT)	24
Washi Tape (WST)	25
Filament Tape (FLT)	26
Aluminum Foil Tape (FOL)	27

MOUNTING JOINING

Double Side Tissue Tape (DT-S)	28
Double Side Tissue Tape (DT-W)	29
Double Side Tissue Tape (DT-H)	30
Double Side EVA Foam Tape (FDT-WS-GREEN)	31
Double Side PE Foam Tape (EFDT-RED)	32

SECURITY AND SAFETY

Warning Tape (FMT-Color)	33
Warning Tape (FMT-Y#B, FMT-W/R)	34

PROTECTION

Surface Protection Tape (PT-CL, PT-BL)	35
----------------------------------------	----

LINT REMOVE

Lint Remover Tape (KTE-BL, KTE-UW)	36
------------------------------------	----

ENVIRONMENT CARE

Bio Tape (KT BIO)	37
-------------------	----

NEW PRODUCTS

Cloth Tape (CT)	38
OPP No noise (OPTNS)	39
OPP 36 Micron (OPT-36MIC)	40



COMPANY PROFILE



Company Profile

VIDEO

ABOUT THAI KK

Our Mission is to deliver a **WOW** product & customer experience by creating walking innovations, sustainable, lifestyle products that fits your everyday needs. Thai KK Group focuses on proactive approach to product high-quality products, with global certifications, to serve the global demands in all industries.

Thai KK Industry Company Limited - with **40 years** of experience in manufacturing high-quality adhesive tapes, we are able to innovate new products that fits all types of applications.

1987

Thai KK Industry Co., Ltd. was established in 1978. It originally started to operate in the domestic market. With the adoption of conglomerate strategies and new market shares from export sales, Thai KK has transformed to a multinational company in recent times.

2012

Thai KK is a market leader in **Label Industry, Adhesive Tapes, Melamine and Urea moulding compounds**. The plant is situated on 60 rai of land (88,000 M2), with about 500 employees in year 2015.

2019

Thai KK is a **market leader** in Label Industry, Adhesive Tapes, Melamine and Urea Moulding compounds.

TECHNOLOGY OVERVIEW



MACHINE

was established in 1978. It originally transformed to a multinational company in recent times.



ADHESIVE

Emulsion/Solvent/Hotmelt

We can formulate various pressure sensitive adhesive technologies that enable converters and end-users to easily meet those customer demands.



AROMATIC SOLVENT RECOVERY

Our systems use the process of distillation which separates volatile and nonvolatile solutions in adhesive solvent.



SEMI-AUTOMATIC SLITTING

To convert and package the widest possible range of materials of any single machine available on the market today.

QUALITY OVERVIEW & SYSTEMS



ISO 9001:2015

International quality assurance system assures its products and services are at a high quality standard for our customers.



ROHS

Restrictions of Hazardous Substances, The original RoHS, restricts the use of six hazardous materials found in electrical and electronic products.



มอก.386-2531

TIS STANDARDS

มอก. 386-2531

Certified pressure-sensitive adhesive tapes for electrical purposes, operating temperature between 0 to 80 degree celcius.



UL CERTIFICATIONS

At Thai KK, we offer a complete product range for UL certified adhesive tapes. Our adhesive tapes have high technical and quality performances for electrical Insulation safety.

NEW PRODUCTS



Cloth Tape



OPP No Noise



OPP 36 Micron



Cloth Tape

For the general usings such as sealing, documenting and multipurpose applications that require extra strength.

- Page 38



OPP No Noise

Suitable for Multi purpose carton sealing, it can be used for removals, shipping and storage, shipping box and suitable for work at night or when others is resting.

- Page 39



OPP 36 Micron

Suitable for general carton sealing, suitable for low weight~1kg, Use in stationary, household, office, and light shipping in factory.

- Page 40

BEST SELL & HOT SELL




OPP Custom Printed Tape

- Page 11



OPP Hybrid Tape

- Page 14



Masking Tape

- Page 20-24



Aluminum Foil Tape

- Page 27

OPP Tape


































OPT

Color  Clear

General Property

- ✓ Surface: Bi Oriented Polypropylene Film
- ✓ Adhesive: Acrylic Emulsion Base
- ✓ Suitable for use in Room Temperature and Low Temp (-5°C)
- ✓ More film options and adhesive thickness available for different weight requirements

Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Capacity Load (kgs)
		Width (mm)				
KK Red 	38 ±2	 12 mm.  18 mm.  24 mm.	20, 30, 45, 50	1.5", 3.0"	144 Rolls	 < 3 kgs.
KK Blue 	40 ±2	 12 mm.  18 mm.  24 mm.				 < 3-5 kgs.
KK Violet 	43 ±2	 12 mm.  18 mm.  24 mm.				 < 5-8 kgs.
KK Orange 	45 ±2	 36 mm.  48 mm.  60 mm.  72 mm.	45, 50, 100, 500, 1000	3.0"	72 Rolls	 < 5-10 kgs.
KK Gray 	48 ±2	 36 mm.  48 mm.  60 mm.  72 mm.				 < 10-15 kgs.
KK Yellow 	50 ±2	 36 mm.  48 mm.  60 mm.  72 mm.				 < 30 kgs.

- Jumbo size: 1280mm x 4000M, 1610mm x 6000M
- OEM : Available on request
- OPP Tape is also available in custom printed tape option



Applications

Carton sealing - suitable for packing and sealing boxes that are light, medium, and heavy weight uses.

Choosing the right packaging tape for the corrugated carton is key for securing the contents properly.

Maximum weight



OPP-BR Tape


































OPT-BR

Color  Brown

General Property

- ✓ Surface: Bi Oriented Polypropylene Film
- ✓ Adhesive: Acrylic Emulsion Based with Brown pigment
- ✓ Suitable for use in Room Temperature and Low Temp (-5°C)
- ✓ More film options and adhesive thickness available for different weight requirements

Product Details

Type	Thickness (Microns)	Product Image Width (mm)	Length (Yd)	Core ID (Inch)	Box (Rolls)	Capacity Load (kgs)
KK Red 	38 ±2	 12 mm.  18 mm.  24 mm.	20, 30, 45, 50	1.5", 3.0"	144 Rolls	 < 3 kgs.
KK Blue 	40 ±2	 12 mm.  18 mm.  24 mm.				 < 3-5 kgs.
KK Violet 	43 ±2	 12 mm.  18 mm.  24 mm.				 < 5-8 kgs.
KK Orange 	45 ±2	 36 mm.  48 mm.  60 mm.  72 mm.	45, 50, 100, 500, 1000	3.0"	72 Rolls	 < 5-10 kgs.
KK Gray 	48 ±2	 36 mm.  48 mm.  60 mm.  72 mm.				 < 10-15 kgs.
KK Yellow 	50 ±2	 36 mm.  48 mm.  60 mm.  72 mm.				 < 30 kgs.

- Jumbo size: 1280mm x 4000M, 1610mm x 6000M
- OEM : Available on request



Applications

Carton sealing - suitable for packing and sealing boxes that are light, medium, and heavy weight uses.

Choosing the right packaging tape for the corrugated carton is key for securing the contents properly.

Maximum weight



OPP-Color Tape

OPT-C

Color



Red



Blue



Yellow



Pink



Green



White



Violet











Orange



General Property

- ✓ Surface: Bi Oriented Polypropylene Film
- ✓ Adhesive: Acrylic Emulsion Based with several pigments
- ✓ Suitable for use in Room Temperature and Low Temp (-5°C)
- ✓ Great adhesion and seal strength, available in 8 colors

Product Details

Type	Thickness (Microns)	Product Image			Length (Yd)	Core ID (Inch)	Box (Rolls)	Capacity Load (kgs)
		Width (mm)						
KK Green 	45 ±2				45, 50, 100, 500, 1000	1.5", 3.0"	72 Rolls	 < 10 kgs.
								

- Jumbo size: 1280mm x 4000M
- Thickness (Microns) 50 ±2 : Available on request
- OEM : Available on request



Applications

For color coding packages, identifying cartons and boxes (FIFO process).

Suitable for inventory organization and product categorization.

Maximum weight



OPP-Custom Printed Tape

OPT-P

Background Color



Standard Design



Customized Design

General Properties

- ✓ BOPP Tape with high tensile strength, coated with acrylic water-based adhesive

Standard Design:









Fragile / Caution / Do Not Accept / Thank You / For You / Season Greeting

Customized Design:

Customized logo to help increase your brand recognition

- ✓ Available in both clear background and opaque color
- ✓ Suitable for use in Room Temperature and Low Temp (-5°C)

Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Capacity Load (kgs)
		Width (mm)				
KK Orange	45 ±2	 18 mm.	45, 50, 100	3.0"	72 Rolls/Box or 144 Rolls/Box	 < 5-10 kgs.
		 24 mm.				
KK Green	50 ±2	 36 mm.				 < 30 kgs.
		 48 mm.				
		 60 mm.				
		 72 mm.				

- Jumbo size: 1280mm x 4000M
- OEM : Logo Available on request

Flexo Printing Tape
MOQ 1-10 Box

Gravure Printing Tape
MOQ 10+ Boxes




Applications

For advertising corporate or brand identity, logistics, plastic bag sealing, carton sealing, mailer bag, and security purposes.

Suitable for cartons sealing medium to heavy-weight.

Maximum weight

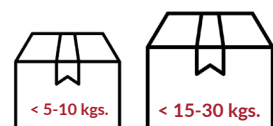

OPP-Hotmelt Tape

OPTHM

Color



Clear



Dark-Brown



General Property

- ✓ Surface: Bi Oriented Polypropylene Film
- ✓ Adhesive: Hot-melt Adhesive
- ✓ Suitable for use in Room Temperature and Cold Temp (-40°C)
- ✓ Good water and moisture resistance



Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Capacity Load (kgs)
		Width (mm)				
KK Orange 	45 ±2	 24 mm. 36 mm. 48 mm. 60 mm. 72 mm.	45, 50, 100, 500, 1000	3"	72 Rolls	 < 15 kgs.
		 24 mm. 36 mm. 48 mm. 60 mm. 72 mm.				 < 20 kgs.
KK Gray 	48 ±2	 24 mm. 36 mm. 48 mm. 60 mm. 72 mm.				

- Jumbo size : On request
- OEM : Available on request



Applications

High performance tape with high tensile strength film.



Suitable for a variety of surfaces applications involving hard-to stick surfaces (recycled corrugated with polyethylene coating). Applicable for heavy duty shipping, frozen food export, and for sealing product that requires moisture resistance.

Maximum weight



OPP-Hotmelt Printed Tape

OPTHM-P

Color  Clear  Brown








General Property

- ✓ OPP Tape with high tensile strength, coated with hotmelt adhesive based
- ✓ Excellent Adhesion and cohesion performance
- ✓ Suitable for use in Room Temperature and **Cold Temp (-40°C)**
- ✓ **Printing Colors: 1-3 Colors**



Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Capacity Load (kgs)
		Width (mm)				
KK Green 	50 ±2	 48 mm.	45, 50, 100, 300, 1000	3.0"	48 Rolls, 58 Rolls, 72 Rolls	 < 30 kgs.
		 60 mm.				
		 72 mm.				

- Jumbo size : On request
- OEM : Logo Available on request



Applications

For advertising corporate or brand identity, logistics, plastic bag sealing, carton sealing, mailer bag, and security purposes.

Suitable for cartons sealing medium to heavy-weight.

Maximum weight



Printed Tape
is also available



OPP-Hybrid Tape

OPT-HB

Color  Yellowish

 Brown

 Orange










General Property


- ✓ Surface: More thick Bi Oriented Polypropylene Film **0.040mm**
- ✓ Adhesive: Hybrid Acrylic Emulsion Base
- ✓ Use Room Temperature and **Cold Temp (-20°C)**
- ✓ Superior impact resistance and shear resistance



Product Details

Type	Thickness (Microns)	Product Image		Length (Yd)	Core ID (Inch)	Box (Rolls)	Capacity Load (kgs)
		Width (mm)					
<div>KK Black</div> <div></div>	60 ±3	<div></div> <div>36 mm.</div>	<div></div> <div>48 mm.</div>	45, 50, 100, 1000	3"	72 Rolls	<div></div> <div>< 35 kgs.</div>
	65 ±3	<div></div> <div>60 mm.</div>	<div></div> <div>72 mm.</div>				<div></div> <div>< 40 kgs.</div>

- Jumbo size : 1610mm x 6000M
- OEM : Available on request

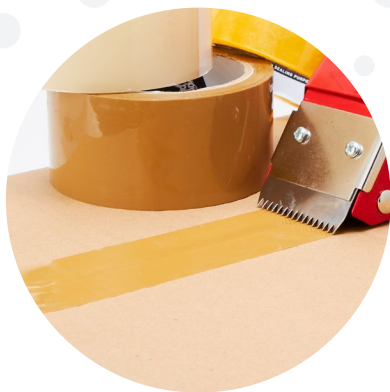

Applications

High performance tape with high tensile strength film.

Suitable for a variety of surfaces applications involving hard-to stick surfaces (recycled corrugated with polyethylene coating). Applicable for heavy duty shipping, frozen food export, and for sealing product that requires moisture resistance.

Maximum weight



Bag Sealing Tape

OST-C

Color  Red

 White








General Property

- ✓ Surface: Bi Oriented Polypropylene Film
- ✓ Adhesive: Hot-melt Adhesive for Plastic sealing
- ✓ Suitable for room temperature and for Cold Temp with humidity
- ✓ Full range of bag and film sealing solutions (bakery)



Product Details

Type	Thickness (Microns)	Product Image	Length (YD)	Core ID (Inch)	Box (Rolls)	Capacity Load (kgs)
		Width (mm)				
KK Gray 	48 ±2	 9 mm.  12 mm.  15 mm.	50	3"	384 Rolls	 < 1 kgs.

- Small size : On request
- OEM : Available on request



Applications

Suitable for plastic bag sealing for bakery, department stores, shopping malls, or supermarkets, for classifying packaging for customers. Also applicable for handcraft decorations, 5S board, etc.

Maximum weight



Kraft Tape

KTE

Color  Natural Brown



General Property

- ✓ Surface: Premium Brown PE Kraft Release Paper
- ✓ Adhesive: Solvent base Rubber Adhesive
- ✓ Suitable for use in Room Temperature and Cold Temp (-20°C)
- ✓ Excellent moisture resistance, good adhesion but can be easy to tear like paper



Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Capacity Load (kgs)
		Width (mm)				
KK Yellow 	145 ±10	 24 mm.  36 mm.  48 mm.  60 mm.  72 mm.	30, 40, 100, 1000	3"	36 Rolls	 < 30 kgs.

- Jumbo size : 1056mm x 600M, 1056mm x 1000M
- OEM : Available on request



Applications

For general purpose packing that are easy to tear by hand, good for use in normal ambient temperature.

Suitable for use in household, office, and many industry. Kraft Paper Tape also gives an environmental-friendly feel for your product.

Maximum weight



PVC Electrical Tape


VTB

Color  Black








General Property

- ✓ Surface: Black Polyvinyl Chloride (PVC) Insulation Film
- ✓ Adhesive: Rubber Solvent Base
- ✓ Can be applied over a wide range of temperature up to 80°C
- ✓ High performance, great flexibility and durability



Product Details

Grade / Series	Thickness (Microns)	Product Image	Length (M)	Core ID (Inch)	Box (Rolls)	Maximum Breakdown (Voltage)
		Width (mm)				
VTB-11 KK Gray 	0.110±0.010	 18 mm.	10, 20	1.5"	100 Rolls, 200 Rolls	 4,800 Volts
VTB-12 KK Green 	0.120±0.010	 18 mm.				

- Lead Free
- Water resistant, good abrasion resistance, UV resistant
- OEM (Length start at 7 yards) : Available on request



Applications







Electrical tapes can be used to insulate wires that conduct electricity and can cause flames. Generally, it can be used for insulation, protection, bundling, maintenance and many other applications. It is also excellent for preventing weather abrasions, and are resistance to water, moisture and corrosion.

Maximum Breakdown voltage



PVC Electrical Color Tape


VTB-C

Color	 Blue	 Green
	 Red	 Gray
	 Yellow	 White








General Property

- ✓ Surface: Color Polyvinyl Chloride (PVC) Insulation Film
- ✓ Adhesive: Rubber Solvent Base
- ✓ Can be applied over a wide range of temperature up to **80°C**
- ✓ High performance, great flexibility and durability



Product Details

Grade / Series	Thickness (Microns)	Product Image	Length (M)	Core ID (Inch)	Box (Rolls)	Maximum Breakdown (Voltage)
		Width (mm)				
VTB-11 KK Gray 	0.110±0.010	 18 mm.	10, 20	1.5"	100 Rolls, 200 Rolls	 4,800 Volts
VTB-12 KK Green 	0.120±0.010	 18 mm.				

- Lead Free
- Water resistant, good abrasion resistance, UV resistant
- OEM (Length start at 7 yards) : Available on request



Applications

Electrical tapes can be used to insulate wires that conduct electricity and can cause flames. Generally, it can be used for insulation, protection, bundling, maintenance, color coding and many other applications. It is also excellent for preventing weather abrasions, and are resistance to water, moisture and corrosion.

Maximum Breakdown voltage




PVC Electrical Tape (TIS)

VTB-TIS

Color  Black

General Property

- ✓ Surface: Flame Retardant grade on PVC InsulationFilm
- ✓ Adhesive: Strong Rubber Solvent Based
- ✓ Can be applied over a wide range of temperature up to **80°C**
- ✓ Great for flame retardant, self-distinguishing and durability



Product Details

Grade / Series	Thickness (Microns)	Product Image	Length (M)	Core ID (Inch)	Box (Rolls)	Maximum Breakdown (Voltage)
		Width (mm)				
VTB-12F (TIS) 	0.125±0.025	 19 mm.	10, 20	1.5"	100 Rolls, 200 Rolls	 40KV/mm at Room Temp 35KV/mm after Humidity condition
VTB-18F (TIS) 	0.180±0.025	 19 mm.				

- Lead Free
- Water resistant, good abrasion resistance, UV resistant
- Non-flammable and Self-Extinguishing



Applications

For wrapping of cable connection with flame retardant property, prevent abrasion that resistance to water/moisture and corrosion that suitable for marking safety areas, product wrapping smoothly.

Maximum Breakdown voltage



40KV/mm at Room Temp
35KV/mm after Humidity condition



Flame Retardant grade

Masking Tape (Stationery)


MCT

Color ☐ Natural White





General Property

- ✓ Surface: Natural White Crepe coating Paper
- ✓ Adhesive: Rubber Solvent Adhesive
- ✓ Use indoor masking and writing for smoothness surfaces
- ✓ Easy to tear by hand and clean removable on surfaces



Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (mm)				
KK Blue 	145 ±15	 12 mm.	20, 30, 40, 100	3"	36 Rolls, 48 Rolls	 60 °C
		 18 mm.				
		 24 mm.				
		 36 mm.				
		 48 mm.				
		 60 mm.				


- Jumbo size : 1250mm x 1800M
- OEM : Available on request



Applications

For stationery general purpose masking tape in economic grade with good enough adhesion for light packaging, bundling, in-door painting and holding and non-critical masking. Ideal for stationery and DIY.

Application Temperature



Masking Tape (Packaging)

MCT

Color  Natural Cream











General Property

- ✓ Surface: Natural Cream Crepe coating Paper
- ✓ Adhesive: Rubber Solvent Adhesive
- ✓ Easy written on surface and most use indoor masking
- ✓ Easy to tear by hand and clean removable on surfaces



Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (mm)				
KK Orange 	135 ±15	 12 mm.	20, 30, 40, 100	3"	36 Rolls, 48 Rolls	 80 °C
		 18 mm.				
		 24 mm.				
		 36 mm.				
		 48 mm.				
		 60 mm.				


- Jumbo size : 1540mm x 1500M
- OEM : Available on request



Applications

For general purpose masking tape for packaging, bundling, holding, splicing, masking, and labeling that suitable for using in household, office, and industrial clean and residue free removable.


Application Temperature



Masking Tape (Painting)


MCT

Color  Natural Beige

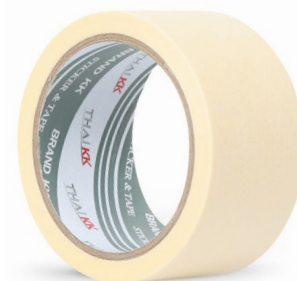









General Property

- ✓ Surface: Natural Beige Crepe coating Paper
- ✓ Adhesive: Strong Rubber Solvent Adhesive
- ✓ Both use interior painting & outdoor painting and automotive car spray repairing
- ✓ Clean removable with no adhesive surfaces



Product Details

Type	Thickness (Microns)	Product Image			Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (mm)						
KK Grey 	165 ±15				20, 30, 40, 100	3"	36 Rolls, 48 Rolls	 100 °C
								
		12 mm.	18 mm.	24 mm.				
		36 mm.	48 mm.	60 mm.				


- Jumbo size : 1250mm x 1600M
- OEM : Available on request



Applications

This masking tape is good strong backing with suitable for car spray painting, indoor painting and splicing. This masking can excellent waterproof crepe for wet sanding application and clean and residue free removal. Ideal used in automotive collision repair industry.

Application Temperature



Masking Tape (Car Spray)

MCT

Color  Yellow-Brown










General Property

- ✓ Surface: Yellow-Brown Crepe coating Paper
- ✓ Adhesive: Stronger Rubber Solvent Adhesive
- ✓ Suitable for automotive car spray repairing and painting
- ✓ Waterproof in wet sanding process



Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (mm)				
KK Green 	135 ±15	 12 mm.	20, 30, 40	3"	36 Rolls, 48 Rolls	 120 °C
		 18 mm.				
		 24 mm.				
		 36 mm.				
		 48 mm.				


- Jumbo size : 1445mm x 1500M
- OEM : Available on request



Applications

Good performance masking tape with suitable for after-market automotive car spray painting, indoor painting and splicing. This masking can excellent waterproof crepe for wet sanding application and cleaner removable with automotive collision repair industry.

Application Temperature



Masking Tape (High-Temp)

MCT

Color  Yellow-Cream



General Property

- ✓ Surface: Yellow-Cream Crepe coating Paper
- ✓ Adhesive: Stronger Rubber Solvent adhesive
- ✓ Suitable for industrial high heat process masking
- ✓ Strong water proof in wet sanding process



Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (mm)				
KK Yellow 	145 ±15	 12 mm.  18 mm.  24 mm.	20, 30, 40	3"	36 Rolls, 48 Rolls	 150 °C
		 36 mm.  48 mm.				


- Jumbo size : 1445mm x 1500M
- OEM : Available on request



Applications

Premium grade of with stand high temperature and leave no residue when surface removed for trouble application masking, bundling, holding, splicing, painting, and labeling that suitable for industrial. Strong waterproof properties, suitable for wet sanding applications.

Application Temperature



Washi Tape

WST

Color  Beige








General Property

- ✓ Surface: Beige Flat Thin Crepe coating Paper
- ✓ Adhesive: Acrylic Emulsion Base
- ✓ Multi-purpose in decorate paper masking
- ✓ Easily removable without leaving residue or damage



Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (mm)				
KK Violet 	120 ±10	 12 mm.  18 mm.  24 mm.	20, 30	1.5"	36 Rolls, 48 Rolls	 80 °C


- Jumbo size : 1230mm x 1800M



Applications

For a washi tape in this general grade with industry, super durable and flexible enough adhesion and doesn't leave a sticky residue behind pull out.

Application Temperature



Filament Tape


FLT

Color  Light yellowish









General Property


- ✓ Surface: Fiberglass Filament OPP Film
- ✓ Adhesive: Hot-melt adhesive
- ✓ Best tensile strength of strapping from fiberglass
- ✓ Durable hold up under handling. Can support weight well



Product Details

Type	Thickness (Microns)	Product Image		Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (mm)					
KK Yellow 	155 ±15	 18 mm.	 24 mm.	30, 50	3"	36 Rolls, 48 Rolls	 80 °C
		 36 mm.	 48 mm.				

- Jumbo size : 1020mm x 1000M
- OEM : Available on request

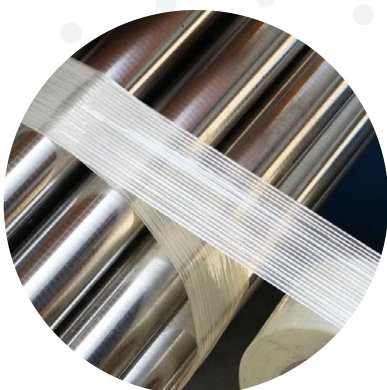

Applications

For strapping rods, moldings, tubes, plywood without danger of scratching, staining or damaging, reinforce cartons, protecting contents from pilferage, holding doors, loose parts on stoves, refrigerator while in transit.

Maximum weight



Aluminum Foil Tape



FOL

Color  Silver























General Property

- ✓ Surface: Good Conductive Aluminum Foil
- ✓ Adhesive: Both Acrylic Emulsion and Acrylic Solvent
- ✓ Use Low Temperature to High Temp (-10°C to 80°C)
- ✓ Moisture and chemical resistance, thermal conductivity



Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (mm)				
FOL#25 KK Orange 	0.050±0.003	 50 mm.  63.5 mm.  75 mm.	50	3"	20 Rolls, 25 Rolls, 30 Rolls	 -10 °C  80 °C
FOL#30 Valu Green <i>Valu Tape</i>	0.060±0.005	 50 mm.  63.5 mm.  75 mm.				
FOL#1 Valu Red <i>Valu Tape</i>	0.065±0.005	 50 mm.  63.5 mm.  75 mm.				
FOL#35 KK Yellow 	0.077±0.005	 50 mm.  63.5 mm.  75 mm.				
FOL#45 KK Green 	0.087±0.005	 50 mm.  63.5 mm.  75 mm.				

- Jumbo size : 1035mm x 1000M
- OEM : Available on request



Applications

Aluminum Foil of medium tack pressure sensitive with high holding power. For general purpose of wrapping the joints of surface in normal ambient temperature and non-flammable.

Self-Extinguishing Flammability



CONSTRUCTION & REPAIRING

ALUMINUM FOIL TAPE (FOL)

Double Side Tissue Tape

DT-Solvent Based

Color ☐ White








General Property

- ✓ Surface: Tissue paper flat base
- ✓ Adhesive: Acrylic Solvent Base
- ✓ Most like substrates@ metal, plastic and paper
- ✓ Moisture and water resistance on sticky



Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (mm)				
DT-S#1 KK Grey 	0.090±0.005	 12 mm.  18 mm.  24 mm.	20, 40	3"	48 Rolls, 72 Rolls, 96 Rolls	 -10-80 °C
		 36 mm.  48 mm.				
DT-S#2 KK Orange 	0.090±0.005	 12 mm.  18 mm.  24 mm.	20, 40	3"	48 Rolls, 72 Rolls, 96 Rolls	 -10-80 °C
		 36 mm.  48 mm.				

- Jumbo size : 1260mm x 1000M
- OEM : Available on request



Applications

For superior performance joining of paper, film, and other substrate that suitable for printed matters, plastic goods, clothes, papers, advertising boards, name plates, electric or electronic parts, cooling equipment, and office automation.



Interior
mounting



External
mounting

Double Side Tissue Tape

DT-Water Based

Color ☐ White

General Property

- ✓ Surface: Tissue paper flat base
- ✓ Adhesive: Acrylic Emulsion Base
- ✓ Most like paper and plastic substrates as Poster
- ✓ Good aging resistance for mounting



Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (mm)				
DT-W#1 KK Red 	0.090±0.005	 12 mm.	20	3"	48 Rolls, 72 Rolls, 96 Rolls	 -5-70 °C
		 18 mm.				
		 24 mm.				
		 36 mm.				
DT-W#2 KK Blue 		 12 mm.				
		 18 mm.				
		 24 mm.				
		 36 mm.				

- Jumbo size : 1040mm x 1000M
- OEM : Available on request



Applications

For stationery purpose joining of paper, film, and other substrate that is suitable for printed matters, plastic goods, papers using in the household, office. Slightly soft performance in plastic bag sealing.



Interior mounting

Double Side Tissue Tape

DT-Hot Melt Based

Color ☐ White










General Property

- ✓ Surface: Tissue paper flat base
- ✓ Adhesive: Hot melt acrylic Base
- ✓ Most like fiber textile, foam laminate and plastic substates
- ✓ Good cold weather resistance for mounting



Product Details

Type	Thickness (Microns)	Product Image		Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (mm)					
<div>DT-H#1</div> <div>KK Violet</div> <div></div>	0.060±0.005	<div></div> <div>12 mm.</div>	<div></div> <div>18 mm.</div>	20	3"	48 Rolls, 72 Rolls, 96 Rolls	<div> -25-70 °C</div>
<div>DT-H#2</div> <div>KK Yellow</div> <div></div>	0.120±0.005	<div></div> <div>12 mm.</div>	<div></div> <div>18 mm.</div>				

- Jumbo size : 1040mm x 1000M
- OEM : Available on request



Applications


This product, For Cold application high adhesion. It is usually used for textile, garment, a variety of leather wallets and backpacks before sewing. Slightly soft, wet adhesive for planar lamination of general foam laminations, name plates and electric or electronic parts.




Suitable for softer materials

Double Side EVA Foam Tape

FDT-WS-GREEN

Color  White

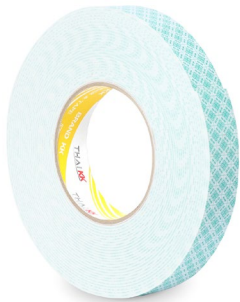






General Property

- ✓ Surface: White color EVA Foam
- ✓ Adhesive: Acrylic Solvent Base
- ✓ Most like high surface energy substrate as mirror hook
- ✓ Good humidity resistance for mounting



Product Details

Type	Thickness (Microns)	Product Image	Length (M)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (mm)				
FDT-WS-GREEN KK Yellow 	1.50+0.20	 12 mm.  20 mm.  24 mm.	5, 10	3.0"	60 Rolls, 120 Rolls	 < 80 °C

- Jumbo size : 1040mm x 10M
- OEM : Available on request



Applications

For fix sticking preferable performance for both indoor and outdoor apply, holding that suitable for light load hangers using in furniture, ,decoration, nameplates, all kinds of poster and sign.



Suitable
light holding
weight

MOUNTING & JOINING

DOUBLE SIDE EVA FOAM TAPE (FDT-WS-GREEN)

Double Side PE Foam Tape

EFDT-R

Color  Black








General Property


- ✓ Surface: Black color Polyethylene Foam
- ✓ Adhesive: Rubber Solvent Base
- ✓ High strength and durable outside mounting
- ✓ Outstanding weather and humidity resistance for mounting



Product Details

Type	Thickness (Microns)	Product Image	Length (M)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (mm)				
EFDT-R KK Yellow 	1.0+0.20	 12 mm.  20 mm.  24 mm.	5, 10	3.0"	60 Rolls, 120 Rolls	 < 80 °C

- Jumbo size : 1040mm x 10M
- OEM : Available on request

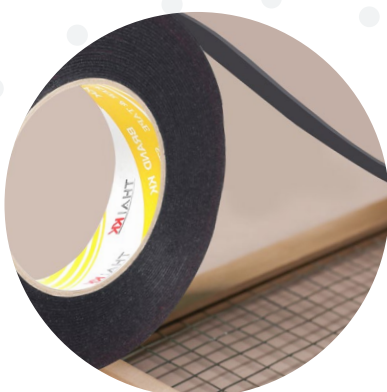

Applications

For high shear strength superior performance and good climate resistance for outdoor apply, high holding that suitable for high load hangers using in furniture, decoration, nameplates, all kinds of vehicles, car body molds and for holding household.



Suitable for perfect hook standing weight

Warning Tape

FMT-Color

Color

Light Yellow

White

Red

Blue












General Property

- ✓ Surface: Stronger Poly Vinyl Chloride Film
- ✓ Adhesive: Rubber Solvent Base
- ✓ Easy apply to all substrate and aggressive adhesive
- ✓ Durability PVC film and good strength in this film



Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (mm)				
FMT-LY KK Yellow 	0.150+0.010	 48 mm. 96 mm.	33	3.0"	15 Rolls, 30 Rolls	 70 °C
FMT-W KK Yellow 		 48 mm. 96 mm.				
FMT-R KK Yellow 		 48 mm. 96 mm.				
FMT-BL KK Yellow 		 48 mm. 96 mm.				

- Logroll size: 1250mm x 33M
- Size Cutting: Available on request



Applications

High adhesion resists abrasion, weather and chemical.
Suitable for industrial and manufacturing facilities for floor marking which identifying behind in parking areas and warehouse.


Durable for both indoor and outdoor using





Warning Tape

FMT-Y#B, FMT-W#R

Color  Yellow with Black

 White with Red

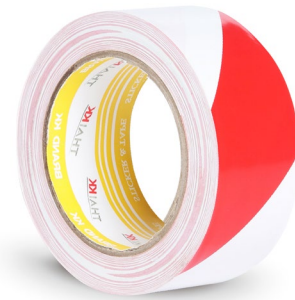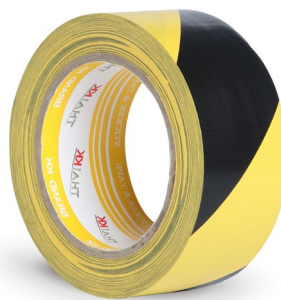






General Property

- ✓ Surface: Hazard pattern printing on Poly Vinyl Chloride Film
- ✓ Adhesive: Rubber Solvent Base
- ✓ Easy apply to all substrate and aggressive adhesive
- ✓ Durability PVC film and good strength in this film



Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (mm)				
FMT-Y#B KK Yellow 	0.150+0.010	 48 mm.	33	3.0"	15 Rolls, 30 Rolls	 70 °C
FMT-W#R KK Yellow 		 48 mm.				

- Logroll size: 1250mm x 33M
- Size Cutting: Available on request



Applications

Suitable for identify lanes, aisles, hazard areas, marking tools and equipment in manufacturing facilities. High adhesion resists abrasion, weather and chemical.

Durable for both indoor and outdoor using




Surface Protection Tape

PT-CL, PT-BL

Color  White

 Blue

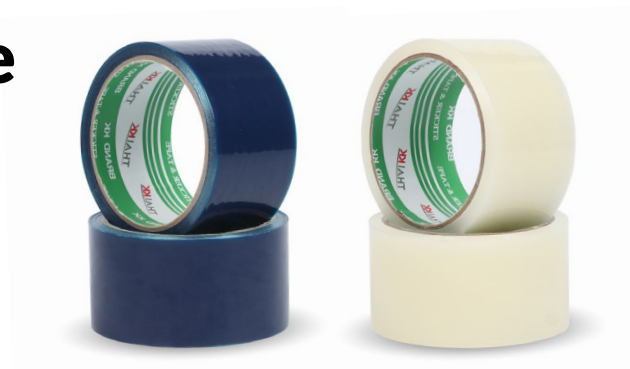

General Property

- ✓ Surface: Low Density Polyethylene Film
- ✓ Adhesive: Removable Acrylic Emulsion
- ✓ Good scratch resistance, doesn't leave adhesive residue after peeling off, Prevent scratches on workpieces of all materials



Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (mm)				
PT-CL 	0.060+0.005	 48 mm.	30, 200	3.0"	16 Rolls, 60 Rolls	 0-60 °C
PT-BL 		 48 mm.				

- Logroll size: 1250mm x 20M
- Size Cutting: Available on request



Applications

For protection on smooth surface & high surface energy; Glass, Polished Metal, Some plastic; Polyester, ABS, Rigid PVC, Polycarbonate, Acrylic, PMMA

Protection on many surfaces



Lint Remover Tape

KTE-BL, KTE-UW

Color



White (No print) / Blue



White (No print) / White








General Property

- ✓ Surface: Blue or White Glassine Release Paper 60g/m²
- ✓ Adhesive: Acrylic Emulsion
- ✓ Convenience in a roller shape and strong sticky adhesive
- ✓ Convenient to carry and no noise, Without electricity



Product Details

Type	Thickness (Microns)	Product Image	Length (M)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (cm)				
KTE-BL 	0.083±0.005	 10 cm.	6.5	1.5"	96 Rolls, 144 Rolls	 -5-70 °C
KTE-UW 		 15.9 cm.				

- Logroll size: 1000mm x 6.5M , 954mm x 6.5M
- Size Cutting: Available on request



Applications

Removal of dust, powder, tiny foreign substances remaining on clothes, chair, car cushion, carpet etc

Convenience in a roller shape



Bio Tape

KT-BIO




Color  Brown

General Property

- ✓ Surface: Brown Kraft Release Paper 70 gsm. with non PE laminated
- ✓ Adhesive: Rubber solvent base
- ✓ Eco-friendly by non-polyethylene laminated on kraft paper and good adhesion
- ✓ It is possible to cut by hand because it is paper material



Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (mm)				
KT-BIO KK Green 	0.150+0.010	 96 mm.	100 Yd and others	3"	18 Rolls	 -20-70 °C

- Logroll size: 1250MM x 100YD etc.
- Size Cutting: Available on request



Applications


Suitable for cartons sealing and paper splicing of a variety of materials which are good for use in normal ambient temperature and suitable for use in household, office, and industry.

Suitable for use in household, office, and industry



Cloth Tape

CT

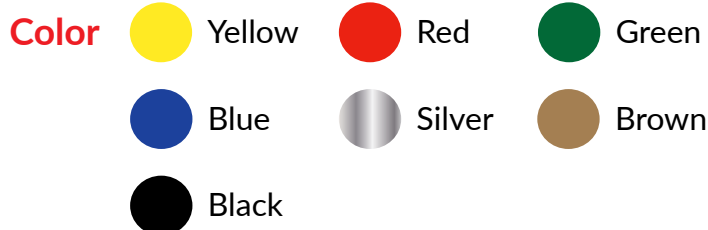

General Property

- ✓ Surface: Color PE Laminated Cloth 70mesh film
- ✓ Adhesive: Synthetic Rubber Base
- ✓ Durable, easy to tear Various colors for different working fields



Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (cm)				
KK Orange 	0.270±0.015	 24 cm. 36 cm. 48 cm.	9 Yd and others	1.5", 3"	50 Rolls	 -5-80 °C


- Logroll size: 1060MM x 600M
- Size Cutting: Available on request



Applications

For the general usings such as sealing, documenting and multipurpose applications that require extra strength.

Extra Strength



OPP No Noise

OPTNS




Color  Clear

General Property

- ✓ Surface: Biaxial Oriented Polypropylene Film 0.028mm
- ✓ Adhesive: Acrylic Emulsion
- ✓ Noiseless silent tape, It is designed to be quiet when unwind it from the roll, will not disturb when packing



Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (cm)				
OPTNS 	0.050±0.002	 48 cm.	50, 100, 1000	3"	72 Rolls	 0-70 °C


- Logroll size: 1280MM x 50YD , 1280MM X 100YD
- Size Cutting: Available on request



Applications

Suitable for Multi purpose carton sealing, it can be used for removals, shipping and storage, shipping box and suitable for work at night or when others is resting.

Suitable for
work at night



NEW PRODUCTS

OPP NO NOISE TAPE (OPTNS)

OPP Tape (36MIC)


OPT-36mic

Color  Clear






General Property

- ✓ Surface: Biaxial Oriented Polypropylene Film 0.025mm
- ✓ Adhesive: Acrylic Emulsion
- ✓ Thin grade, Cheap price



Product Details

Type	Thickness (Microns)	Product Image	Length (Yd)	Core ID (Inch)	Box (Rolls)	Temp. Use (°C)
		Width (cm)				
OPT-36mic 	0.036±0.002	 48 cm.	45, 50, 100	3"	72	 0-70 °C

- Logroll size: 1610MM x 6000M
- Size Cutting: Available on request



Applications

Suitable for general carton sealing, suitable for low weight~1kg, Use in stationary, household, office, and light shipping in factory.

Suitable For
Low Weight~1kg



One-Stop
Solution Provider

SHOP ONLINE

Easy shopping,
Anytime Anywhere!

WWW.THAIKK.CO.TH



Quality Over Price



Delivery In 1 day



Consulting Service



Customized
Design Service



ENDLESS VALUE EVERY DAY
EASY ONLINE ORDERING



**KK REWARDS
POINTS**

ลูกค้าที่เป็นสมาชิก KK Point
สะสมทุกการใช้จ่าย



**CREDIT CARD
PAYMENT**

สะดวกด้วยการชำระเงิน
ผ่านบัตรเครดิต



RETURNABLE

รับคืนสินค้าภายใน 14 วัน
(เงื่อนไขตามที่บริษัทกำหนด)

LINE

PROMOTION

ALERT





Thai KK, we are a manufacturer who are produce and supply the high quality adhesive tape recognized by both domestic and international customers.



thaikk.co.th



@thaikk

SHOP ONLINE



THAI KK INDUSTRY Co., Ltd. (Head office)

29/1 Moo.5 Soi Thummasiri, Debaratana Road,
Tumbol Bangsaotong, Amphur Bangsaotong,
Samutprakarn 10570 Thailand

Tel: +662 338 4900, Fax: +662 338 4905

www.thaikk.co.th